


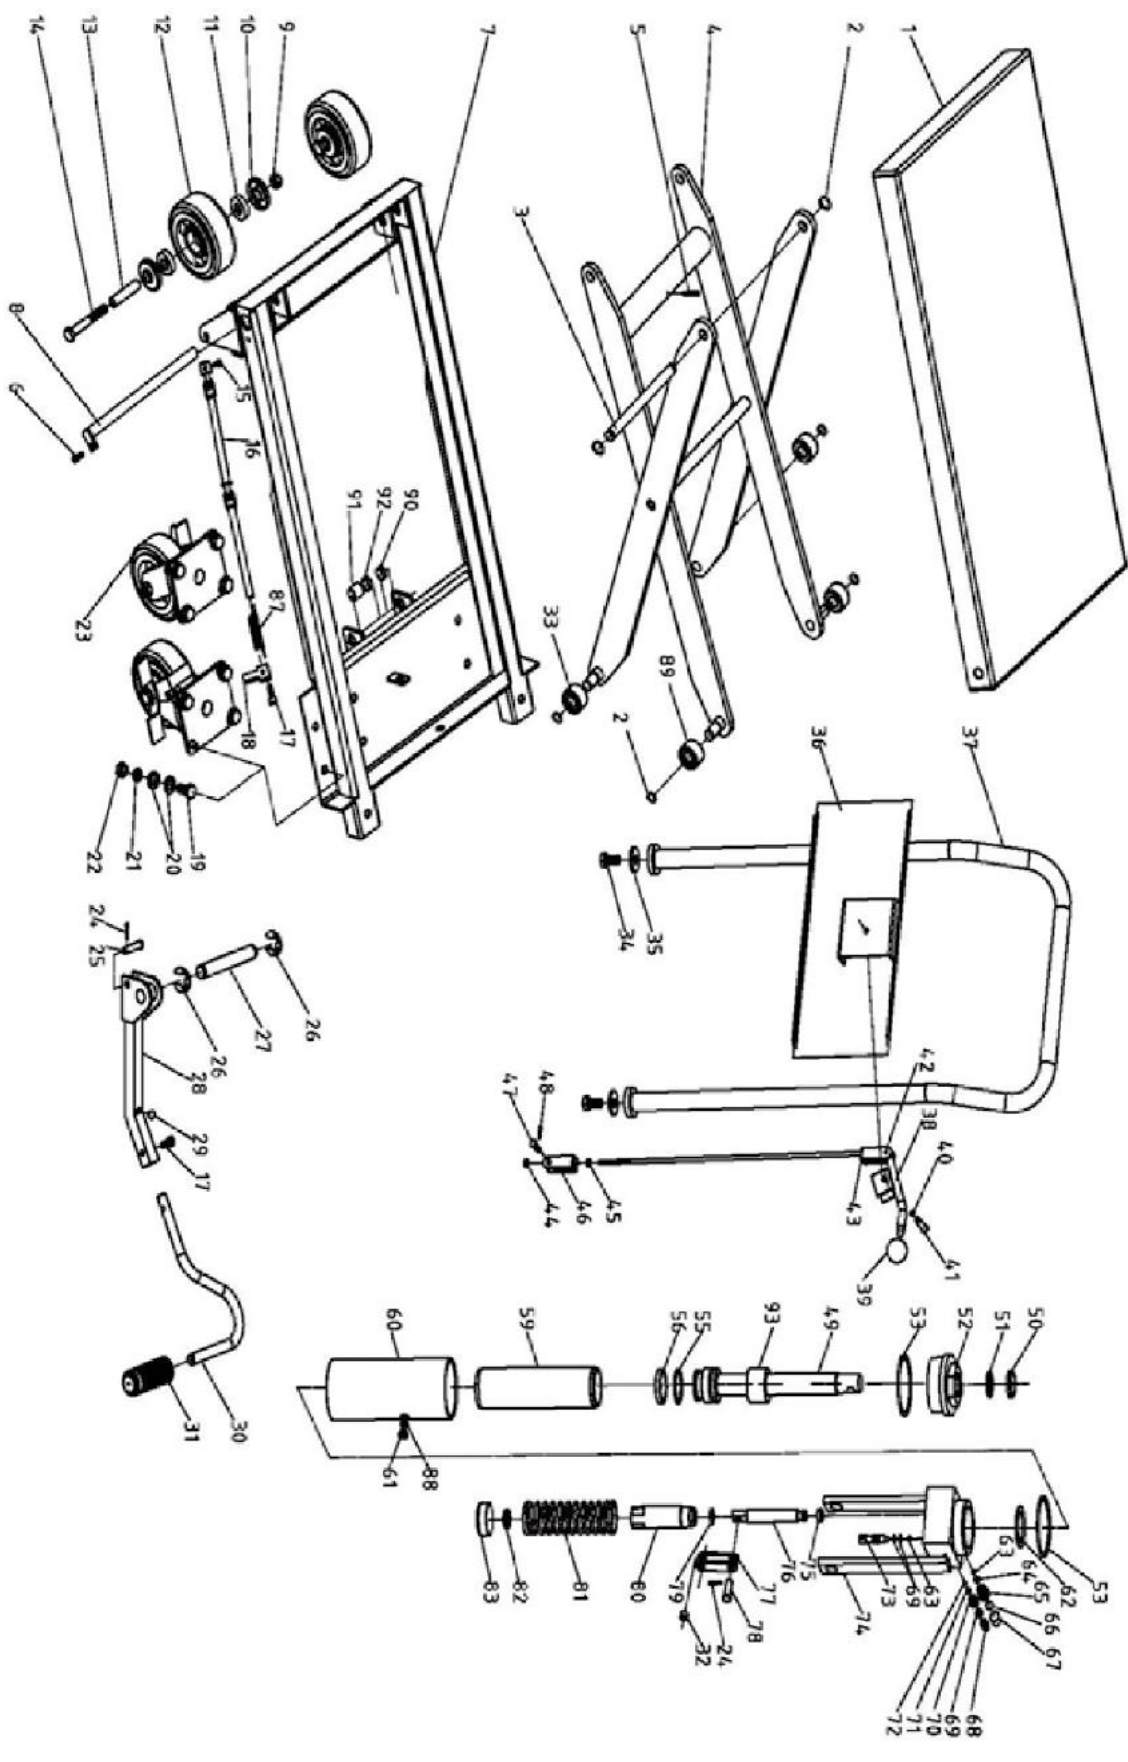

SYTJ-75/100

NO.	Description	Specification	Quantity	NO.	Description	Specification	Quantity	NO.	Description	Specification	Quantity	NO.	Description	Specification	Quantity
1	Top table	1000*515*55	1	22	Nut	M10	8	43	pull rod set	Φ6*4/5	1	67	inside hexagonal set screw	M16*16	1
2	Snap ring	Φ20	2	23	Rear wheels	Φ150*50	2	44	Self-lock nut	M6	1	68	Pressure-adjusting screw	Φ12*24	1
3	Pin	Φ20*332	1	24	Split ring	Φ3*25	2	45	Nut	M6	1	69	O-ring	D8*1.8	3
4	Lift frame		1	25	Pedal rod pin	Φ10*43	1	46	Connector	50*22*18	1	70	Pressure-adjusting spring	D7.5*Φ1.9*18	1
5	spring pin	Φ6*35	2	26	Split ring	15	2	47	Pin	Φ8*28	1	71	Spring seat	Φ8*8	1
6	inside hexagonal bolt	M8*15	1	27	Cylinder seat pin	Φ20*144	1	48	Split pin	Φ2.5*25	1	72	Ball	S5	1
7	Base ass'y		1	28	Pedal rod	22*22*450	1	49	lifting piston rod	Φ32*300	1	73	Oil drain screw	Φ12*45	1
8	frame axle	Φ25*295	1	29	Rubber cap	Φ8*10	1	50	Dh03-dust ring	32*41*3/6	1	74	Valve plate set	90*90*70	1
9	Self-locking Nut	M12	2	30	Pedal handle	Φ16*420	1	51	O-ring	D31.5*3.55	1	75	YXD Sealing ring	D18*12*8	1
10	Bearing cap		4	31	Rubber pedal cover	Φ45*100	1	52	Cylinder nut	Φ90*47	1	76	Compression piston rod	Φ18*132	1
11	Bearing	6202/6203	4	32	Pedal connecting link sleeve	Φ10.2*Φ16*9.5	1	53	Nylon flat washer	90*80*2	2	77	Connector	110*22*5	2
12	Front wheel	Φ150*50	2	33	Roller	Φ40*30	2	55	O-ring	D43.7*3.55	1	78	Pin	Φ10*33	1
13	Bolt cover		2	34	outside hexagonal bolt	M12*40	2	56	YXD Sealing ring	D50*40*9	1	79	O-ring	D18*2.65	1
14	Bolt	M12*85	2	35	Handle seat washer	12 larger	2	59	Lifting cylinder piston	Φ60*Φ50*232	1	80	Compression cylinder piston	Φ32*114	1
15	inside hexagonal bolt	M5*8	1	36	Control Panel	400*180*12	1	60	cylinder tube	Φ89*Φ80*232	1	81	compression cylinder spring	D43*Φ5*160	1
16	Universal joint ass'y		1	37	Handle Knob	Φ28*1940	1	61	Oil plug screw	M8	1	82	Dh03-dust ring	18*26*4.5/6	1
17	inside hexagonal bolt	M8*20	1	38	Handle	Φ12*200	1	62	Nylon flat washer	60*45*2	1	83	Spring cover	Φ82*2	1
18	Swing rod	45*20*20	1	39	Handle ball	M10	1	63	Ball	S6	2	87	Torsional spring		1
19	Bolt	M10*35	8	40	Split ring	Φ6	8	64	Ball	S9	1	88	O-ring	D8*1.8	1
20	Washer	Φ10	16	41	Pin	Φ8*40	1	65	control spring	D9.5/6.5*Φ0.5*21	1	89	Roller	Φ44*30	2
21	Spring washer	Φ10	8	42	Thin-head rivet	3*25	1	66	Ball	S12	1	94	inside hexagonal bolt	M6*20	1
90	Pedal mounting Sleeve	Φ28*Φ22*8	2	91	Pedal mounting Sleeve	Φ28*Φ22*28	1	92	Pedal mounting Sleeve	Φ28*Φ22*15	1	93	cylinder limit sleeve	Φ48*Φ32*55	1